Door Quoting Information Sheet

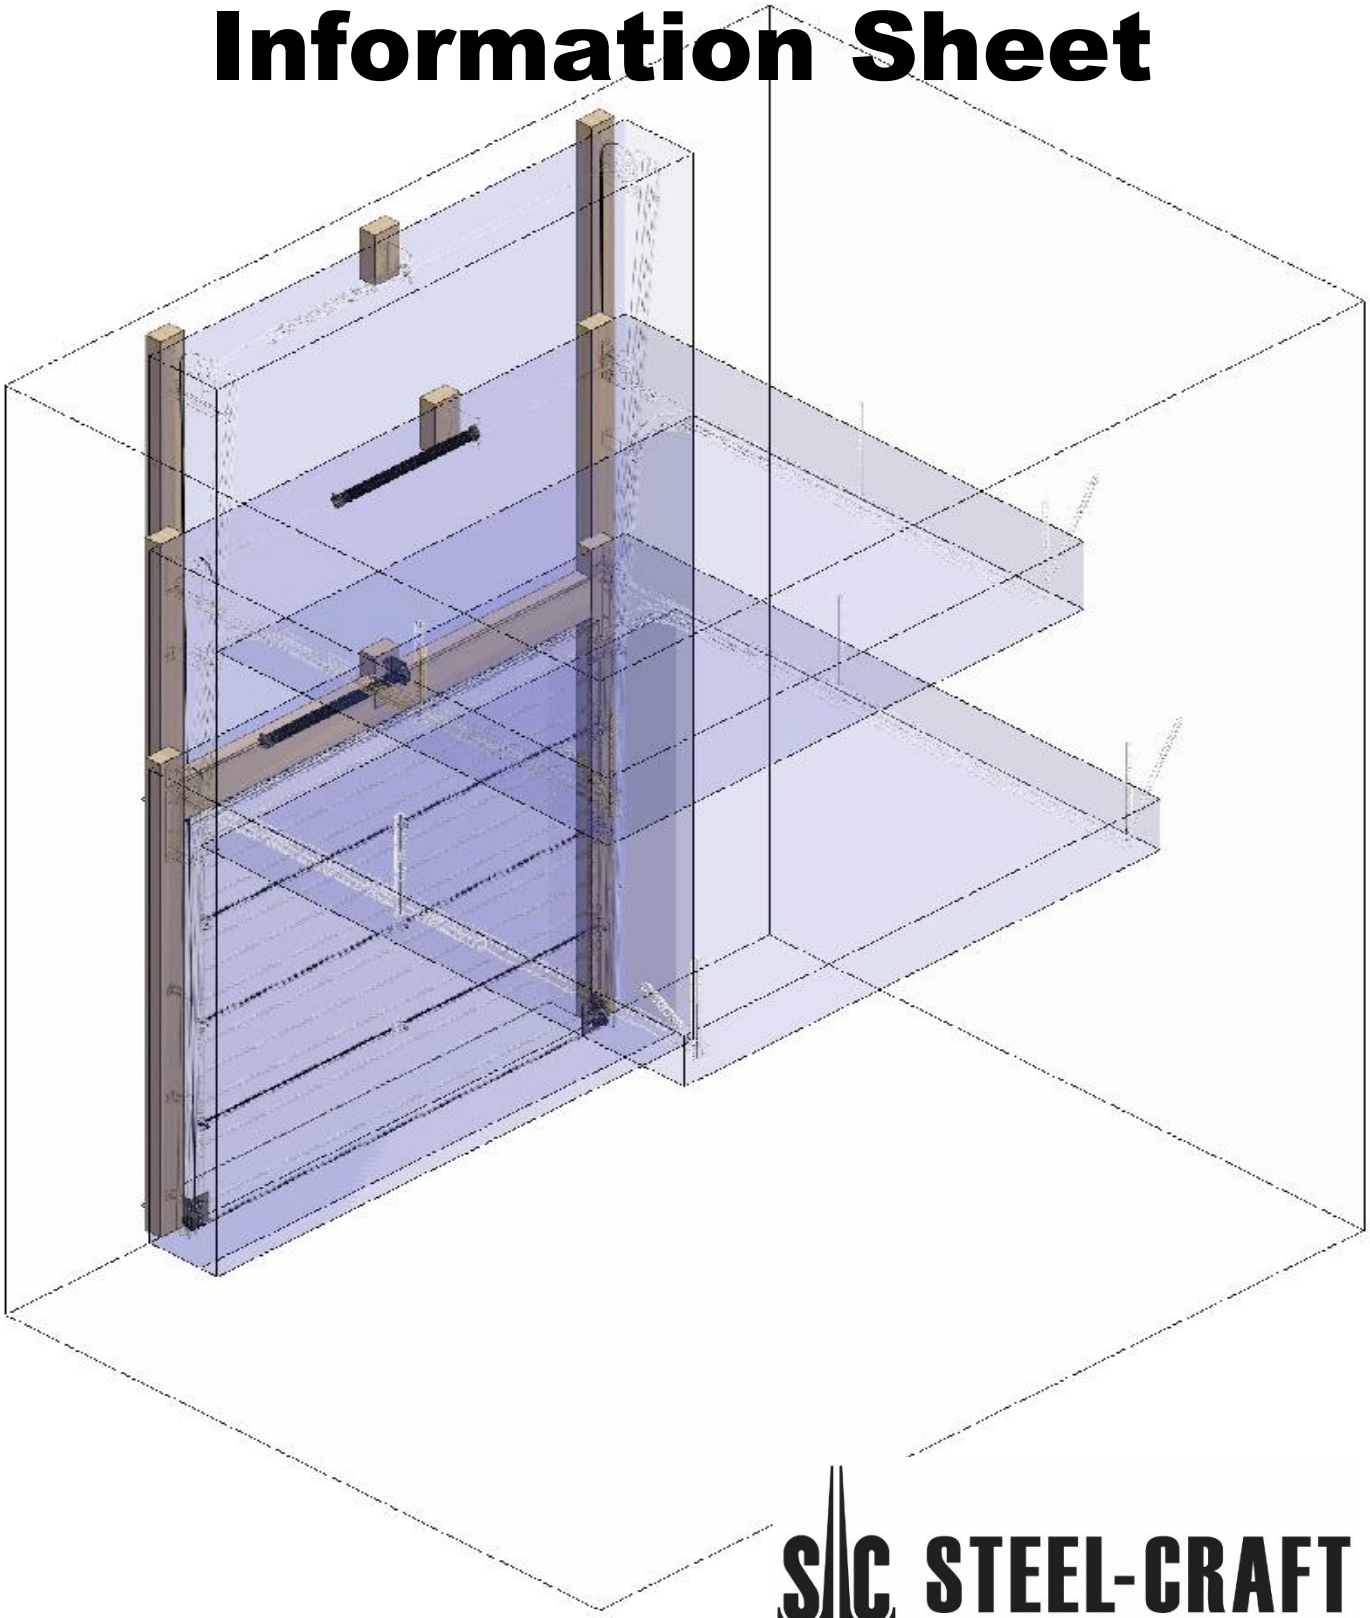

STEEL-CRAFT
DOOR PRODUCTS LTD.

Door Space

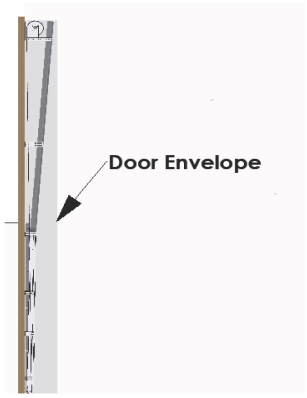

Full Vertical Lift

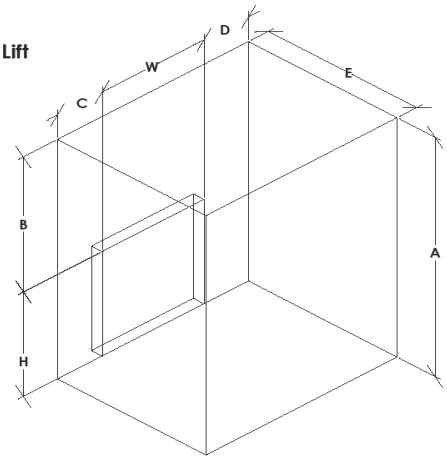



High Lift

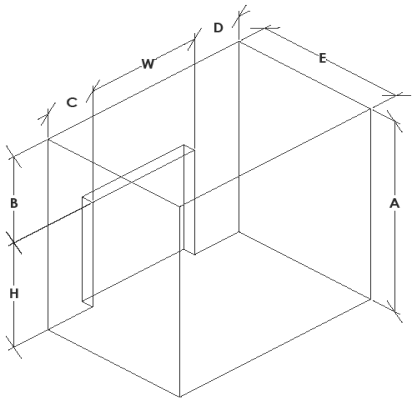



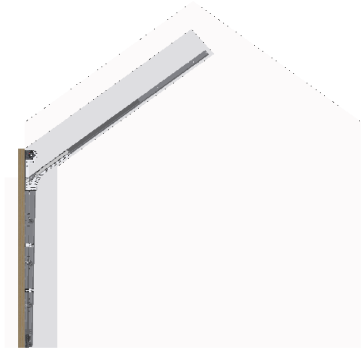

Pitch Lift

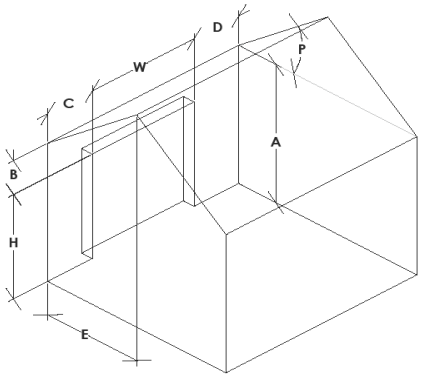





Standard Lift

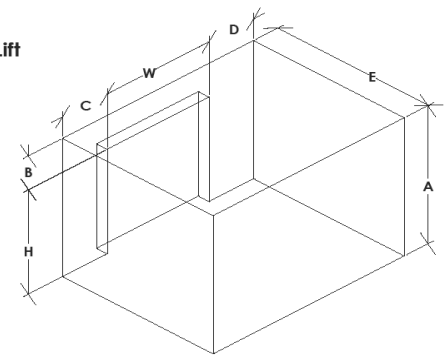



1 Job Information

Date:

Retail Customer:		Install Company:	
Contact Name:		Contact Name:	
Address:		Phone Number:	
Phone Number:		Email:	
Email:			
Job Site Address:			
Required Date:			
Quote #:		Purchase Order #:	
Sales Order #:			

2 Door Specifications

Width:		Height:	
Style:		Color:	

Windows:

- No. of rows of windows:		
- No. of windows per row:		
- Frame Color:		
- Insert & Design:	Yes/No	
- Insert Color:		

Glass:

- Glass panes	Single	Double	Triple
- Glass Color/Tint			
- Mutin Bars	Yes/No		
- Mutin Bar Style			

Placement of windows:

TOP

Sketch Window Placment
Sketch Window Placment
Sketch Window Placment
Sketch Window Placment
Sketch Window Placment

BTM

3 Door Space/Door Envelope Dimensions

Door Space restrictions will determine what Lift Type(s) you can choose, **Refer to the standard drawings on the back of this form** to choose the lift type that fits your application needs and fill in ALL dimensions that apply below.

(A) Floor to Lowest Overhead Obstacle:	
(B) Top of Door Opening to Lowest Overhead Obstacle:	
(C) Left side of Door Opening to Closest Obstruction:	
(D) Right side of Door Opening to Closest Obstruction:	
(E) Door wall to Closest Obstruction:	
(F) Finished Opening height:	
(W) Finished Opening width:	
(P) Pitch of Ceiling:	

Door Envelope **MUST be free and clear of any obstructions** for proper installation and operation of overhead door system. Door Envelope is Door Specific and changes based on door weight, and Lift Type. **Refer to sample drawings for examples of the required Door Envelope**

Lift Type Preferred:		X	
Standard Lift			
	a. Flag Track		
	b. Symmetrical		
	c. Low headroom Quick Close		
	d. Low headroom double track		
High Lift			Amount: xx"
Full Vertical Lift			
Pitch Lift			

4 Door Mounting Specifications

Building Wall Framing Construction:		X
	Wood	
	Steel	
	Concrete	
	Brick	
	Cinder Block	

Building Ceiling Construction:		X
Truss:	Wood	
	Steel	
Concrete:	Precast	
	Pour In Place (Steel Pan)	
Ceiling Finish:	None	
	Drywall	
	Metal panels	

5 Mounting Options - (Commercial/Industrial Door)

If door mounting options are unknown discuss with SteelCraft Sales representative

	X
Angle Mount	
Reverse Angle Mount	

6 Torsion Options

				X
Standard cycles	10000			
High cycles	25000	50000	100000	

7 Safety Options

	X
Reverse Safety Edge	
Pnuematic Safety Edge	
Extra Photo Sensors	

8a Door Operation Options -Residential

Residential:				X
	Electric Operator			
	Voltage	120 240		
	Rail Mount			
		Belt	Chain	
	Wall mount			
		Left	Right	
	Side Lock			
		Manual		
		Electric		

8a Door Operation Options -Industrial

Commercial/Industrial:

Chain Hoist						
	Single Reduction					
	Double Reduction					
Electric Operator						
	Voltage	120 208/240 480 575				
	Phase					
		Single		Double		
	Rail Mount					
	Wall Mount					
		Left		Right		
	Trolly Mount					
Side Lock						
		Manual				
		Electric				

9 Shop Drawings

1. Shop Drawings will NOT be started until ALL mandatory data (Red Text) is supplied above and SIGNED OFF by both the Install Contractor AND the End Customer

2. If Door site changes after signed off drawings are submitted a change order form MUST be filled out and signed along with a new Site Detail Form. Re-work charges may apply.

3. If the site changes after production of door has begun all additional costs will be tallied and forwaded to purchaser. Door(s) will not ship until updated PO is received.

		X		X
Shop Drawing Required	Yes		No	
Drawing Units required	SAE		Metric	

Sign Off

Installer/Contractor Date

Print		
Signature		

End Customer

Print		
Signature		

Notes: